

# Online Belief Propagation for Topic Modeling

Jia Zeng, *Member, IEEE*, Zhi-Qiang Liu and Xiao-Qin Cao

**Abstract**—Not only can online topic modeling algorithms extract topics from big data streams with constant memory requirements, but also can detect topic shifts as the data stream flows. Fast convergence speed is a desired property for batch learning topic models such as latent Dirichlet allocation (LDA), which can further facilitate developing fast online topic modeling algorithms for big data streams. In this paper, we present a novel and easy-to-implement fast belief propagation (FBP) algorithm to accelerate the convergence speed for batch learning LDA when the number of topics is large. FBP uses a dynamic scheduling scheme for asynchronous message passing, which passes only the most important subset of topic messages at each iteration for fast speed. From FBP, we derive an online belief propagation (OBP) algorithm that infers the topic distribution from the previously unseen documents incrementally by the online gradient descent. We show that OBP can converge to the local optimum of the LDA objective function within the online stochastic optimization framework. Extensive empirical studies demonstrate that OBP significantly reduces the learning time and achieves a much lower predictive perplexity when compared with that of several state-of-the-art online algorithms for LDA, including online variational Bayes (OVb) and online Gibbs sampling (OGS) algorithms.

**Index Terms**—Latent Dirichlet allocation, topic models, online belief propagation, convergence speed, online Gibbs sampling, online variational Bayes.



## 1 INTRODUCTION

Probabilistic topic modeling [1] is an important problem in machine learning and data mining. As one of the simplest topic modeling algorithms, the batch latent Dirichlet allocation (LDA) [2] algorithm has to sweep repeatedly the entire data set until convergence, which can be broadly categorized into three strategies: variational Bayes (VB) [2], collapsed Gibbs sampling (GS) [3] and loopy belief propagation (BP) [4].

We can interpret VB, GS and BP as message passing algorithms, which infer the posterior distribution of topic label for each word called *message*, and estimate parameters by the iterative expectation-maximization (EM) algorithm according to the maximum-likelihood criterion [5]. These EM algorithms mainly differ in the E-step for message update equations. For example, VB is a synchronous variational message passing algorithm [6], which updates the variational messages by complicated digamma functions that slow down the learning speed [4], [7]. In contrast, GS updates messages by discrete topic labels randomly sampled from the messages in the previous iteration. Obviously, the sampling operation does not keep all uncertainties encoded in the previous messages. In addition, such a Markov chain Monte Carlo (MCMC) sampling process often requires more iterations until convergence. Without sampling from messages, BP directly uses the previous messages to update the current messages. Such a deterministic process often takes a significantly less number of iterations than GS to achieve convergence. According to a recent comparison [4], VB

requires around 100 iterations, GS takes around 300 iterations and synchronous BP (sBP) needs around 170 iterations to achieve convergence in terms of training perplexity [2], which is a performance measure to compare different learning algorithms of LDA [7].

However, the batch LDA algorithm has a high time complexity for big data sets. For example, VB [2] requires around 7 days to scan 8,200,000 PUBMED documents when the number of iterations  $T = 100$  and the number of topics  $K = 100$ . In addition, batch LDA algorithms usually have a high space complexity scaling linearly with the number of documents  $D$ . For example, when  $D = 10^7$ , VB cannot handle the big data set on a common desktop computer with 4G memory. To process big data sets, online [8]–[15] and parallel [16]–[21] LDA algorithms have been two widely used strategies. Since parallel learning algorithms depend on expensive parallel hardware and their space complexity still scale linearly with the number of documents  $D$ , in this paper, we study online LDA algorithms that require only a constant memory usage to detect topic distribution shifts as the big data stream flows.

Online LDA algorithms partition the entire  $D$  documents into  $M$  small mini-batches with size  $S$ , and use the online gradient produced by each mini-batch to estimate topic distributions sequentially. Each mini-batch is discarded from the memory after one look. So, the memory cost scales linearly with the mini-batch size  $S$ , where  $S$  is a fixed number provided by users and  $S \ll D$ . Because the online gradient computation for each mini-batch requires a significantly less number of iterations until convergence [22], online algorithms are usually faster by a factor of 5 than batch algorithms. Current online LDA algorithms are derived from the batch counterparts like GS and VB, e.g., online GS (OGS) [8]–[12]

- J. Zeng is with the School of Computer Science and Technology, Soochow University, Suzhou 215006, China. E-mail: j.zeng@ieee.org.
- Z.-Q. Liu and X.-Q. Cao are with the School of Creative Media, City University of Hong Kong, Hong Kong, China.

and online VB (OVB) [13]–[15]. The convergence speed for the online gradient descent computation determines the efficiency of online LDA algorithms. For example, OVB [13] does not start optimizing the next mini-batch until the previous mini-batch achieves convergence. So, the faster convergence speed of batch algorithms will lead to the faster online algorithms for big data streams.

In this paper, we present a novel fast belief propagation (FBP) algorithm to accelerate the convergence speed for batch learning LDA. Compared with sBP [4], FBP uses an informed scheduling strategy for asynchronous message passing, in which it efficiently influences those slow convergent messages by passing the fast convergent messages with a higher priority. Through dynamically scheduling the order of message passing based on the residuals of two messages resulted from successive iterations, FBP converges significantly faster and more often than general sBP on cluster or factor graphs [23]. Because the topic messages are usually sparse [10], [24], FBP selects and passes only the important subset of topic messages according to the convergence speed. Therefore, FBP runs fast in case of the large number of topics. From FBP, we derive the online belief propagation (OBP) to compute the online gradient descent of topic distribution based on the previously unseen mini-batch incrementally. More specifically, OBP combines FBP with the stochastic gradient descent algorithm [22], which ensures that OBP can converge to the stationary point of the LDA joint probability by a series of online gradient updates. Experiments on four big data streams confirm that OBP is not only faster but also more accurate than several state-of-the-art online LDA algorithms such as OGS [10] and OVB [13].

This paper is organized as follows. Section 2 presents the FBP algorithm having the fast convergence speed for learning LDA. Section 3 derives OBP from FBP, and demonstrates that OBP is a stochastic gradient descent algorithm converging to a stationary point. Section 4 compares FBP and OBP with several state-of-the-art batch and online LDA algorithms on four real-world text corpora. Finally, Section 5 draws conclusions and envisions future work.

## 2 FAST BELIEF PROPAGATION

In this section, we begin by briefly reviewing the BP algorithm for learning the collapsed LDA [4]. The probabilistic topic modeling task can be interpreted as a labeling problem, in which the objective is to assign a set of thematic topic labels,  $\mathbf{z}_{W \times D} = \{z_{w,d}^k\}$ , to explain the observed elements in document-word matrix,  $\mathbf{x}_{W \times D} = \{x_{w,d}\}$ . The notations  $1 \leq w \leq W$  and  $1 \leq d \leq D$  are the word index in vocabulary and the document index in corpus. The notation  $1 \leq k \leq K$  is the topic index. The nonzero element  $x_{w,d} \neq 0$  denotes the number of word counts at the index  $\{w, d\}$ . For each word token, there is a topic label  $z_{w,d}^k = \{0, 1\}$ ,  $\sum_{k=1}^K z_{w,d}^k = 1$ ,  $1 \leq i \leq x_{w,d}$ , so that the topic label for the word index

$\{w, d\}$  is  $z_{w,d}^k = \sum_{i=1}^{x_{w,d}} z_{w,d,i}^k / x_{w,d}$ . After integrating out the document-specific topic proportions  $\theta_d(k)$  and topic distribution over vocabulary words  $\phi_w(k)$  in LDA, we obtain the joint probability of the collapsed LDA [25],

$$p(\mathbf{x}, \mathbf{z}; \alpha, \beta) \propto \prod_d \prod_k \Gamma\left(\sum_w x_{w,d} z_{w,d}^k + \alpha\right) \times \prod_w \prod_k \Gamma\left(\sum_d x_{w,d} z_{w,d}^k + \beta\right) \times \prod_k \Gamma\left(\sum_{w,d} x_{w,d} z_{w,d}^k + W\beta\right)^{-1}, \quad (1)$$

where  $\Gamma(\cdot)$  is the gamma function, and  $\{\alpha, \beta\}$  are fixed symmetric Dirichlet hyperparameters [3].

The sBP algorithm [4] computes the posterior probability,  $\mu_{w,d}(k) = p(z_{w,d}^k = 1, x_{w,d} | \mathbf{z}_{-w,-d}^k, \mathbf{x}_{-w,-d})$ , called *message*,  $0 \leq \mu_{w,d}(k) \leq 1$ , which can be normalized using a local computation, i.e.,  $\sum_{k=1}^K \mu_{w,d}(k) = 1$ . The message update equation is

$$\mu_{w,d}(k) \propto [\hat{\theta}_{-w,d}(k) + \alpha] \times \frac{\hat{\phi}_{w,-d}(k) + \beta}{\sum_w \hat{\phi}_{w,-d}(k) + W\beta}, \quad (2)$$

where

$$\hat{\theta}_{-w,d}(k) = \sum_{-w} x_{-w,d} \mu_{-w,d}(k), \quad (3)$$

$$\hat{\phi}_{w,-d}(k) = \sum_{-d} x_{w,-d} \mu_{w,-d}(k), \quad (4)$$

where  $-w$  and  $-d$  denote all word indices except  $w$  and all document indices except  $d$ . Obviously, the message update equation (2) depends on all other messages  $\mu_{-w,-d}$  excluding the current message  $\mu_{w,d}$ . After the normalized messages converge, the document-specific topic proportion  $\theta$  and the topic distribution over the fixed vocabulary  $\phi$  can be estimated as

$$\theta_d(k) = \frac{\hat{\theta}_d(k) + \alpha}{\sum_k \hat{\theta}_d(k) + K\alpha}, \quad (5)$$

$$\phi_w(k) = \frac{\hat{\phi}_w(k) + \beta}{\sum_w \hat{\phi}_w(k) + W\beta}. \quad (6)$$

The synchronous schedule  $f^s$  updates all messages (2) in parallel simultaneously at iteration  $t$  based on the messages at previous iteration  $t-1$ :

$$f^s(\mu_{1,1}^{t-1}, \dots, \mu_{W,D}^{t-1}) = \{f(\mu_{-1,-1}^{t-1}), \dots, f(\mu_{-w,-d}^{t-1}), \dots, f(\mu_{-W,-D}^{t-1})\}, \quad (7)$$

where  $f^s$  is the message update function (2) and  $\mu_{-w,-d}$  is all set of messages excluding  $\mu_{w,d}$ . The asynchronous schedule  $f^a$  updates the message of each variable in a certain order, which is in turn used to update other neighboring messages immediately at each iteration  $t$ :

$$f^a(\mu_{1,1}^{t-1}, \dots, \mu_{W,D}^{t-1}) = \{\mu_{1,1}^t, \dots, f(\mu_{-w,-d}^{t-1}), \dots, \mu_{W,D}^{t-1}\}, \quad (8)$$

where the message update equation  $f$  is applied to each message one at a time in some order.

## 2.1 Speed Up Convergence

The basic idea of FBP for LDA is to select the descending update order (8) based on the messages' residuals  $r_{w,d}$ , which are defined as the  $p$ -norm of difference between two message vectors at successive iterations [23],

$$r_{w,d}(k) = x_{w,d} \|\mu_{w,d}^t(k) - \mu_{w,d}^{t-1}(k)\|_p, \quad (9)$$

where  $x_{w,d}$  is the number of word counts. For simplicity, we choose the  $L_1$  norm with  $p = 1$ . In practice, the computational cost of sorting (9) is very high because we need to sort all non-zero residuals  $r_{w,d}$  in the document-word matrix at each learning iteration. Obviously, this scheduling cost is expensive in case of big data sets. Alternatively, we may accumulate residuals based on the document index,

$$r_d(k) = \sum_w r_{w,d}(k), \quad (10)$$

$$r_d = \sum_k r_d(k). \quad (11)$$

These residuals can be computed during the message passing process at a negligible computational cost. Also, the time complexity of sorting (10) and (11) in the descending order are at most  $\mathcal{O}(K \log K)$  and  $\mathcal{O}(D \log D)$ , respectively. As a result, the sorting time is short during each learning iteration.

Here, we demonstrate that the FBP algorithm has a faster convergence rate than sBP [4]. We assume that the message update equation  $f$  in (2) is a contraction function under some norm [23], so that

$$\|\mu^t - \mu^*\| \leq \gamma \|\mu^{t-1} - \mu^*\|, \quad (12)$$

for some global contraction factor  $0 \leq \gamma \leq 1$ . Eq. (12) guarantees that the messages  $\mu^t = \{\mu_{1,1}^t, \dots, \mu_{W,D}^t\}$  will converge to a fixed-point  $\mu^* = \{\mu_{1,1}^*, \dots, \mu_{W,D}^*\}$  in the synchronous schedule (7). This assumption often holds true for sBP in learning the collapsed LDA [4] based on the cluster or factor graphical representation. According to [23], the asynchronous schedule (8) will also converge to a fixed-point  $\mu^*$  if  $f$  is a contraction mapping and for each message  $\mu_{w,d}(k)$ , there is a finite time interval, so that the message update equation  $f$  is executed at least once in this time interval. As a result, the FBP algorithm will converge to a fixed-point  $\mu^*$  as sBP.

To speed up convergence in the asynchronous schedule (8), we choose to update the message  $\mu_{w,d}$  to minimize the largest distance  $\|\mu_{w,d}^t - \mu_{w,d}^*\|$  first. However, we cannot directly measure the distance between a current message and its unknown fixed-point value. Alternatively, we can derive a bound on this distance that can be calculated easily. Using the triangle inequality, we obtain

$$\begin{aligned} \|\mu_{w,d}^t - \mu_{w,d}^{t-1}\| &= \|\mu_{w,d}^t - \mu_{w,d}^* + \mu_{w,d}^* - \mu_{w,d}^{t-1}\| \\ &\leq \|\mu_{w,d}^t - \mu_{w,d}^*\| + \|\mu_{w,d}^{t-1} - \mu_{w,d}^*\| \\ &\leq \gamma \|\mu_{w,d}^{t-1} - \mu_{w,d}^*\| + \|\mu_{w,d}^{t-1} - \mu_{w,d}^*\| \\ &= (1 + \gamma) \|\mu_{w,d}^{t-1} - \mu_{w,d}^*\|. \end{aligned} \quad (13)$$

According to (12) and (13), we derive the bound (14) as follows

$$\begin{aligned} \|\mu_{w,d}^t - \mu_{w,d}^*\| &\leq \gamma \|\mu_{w,d}^{t-1} - \mu_{w,d}^*\| \\ &= \|\mu_{w,d}^{t-1} - \mu_{w,d}^*\| - (1 - \gamma) \|\mu_{w,d}^{t-1} - \mu_{w,d}^*\| \\ &\leq \|\mu_{w,d}^{t-1} - \mu_{w,d}^*\| - \frac{1 - \gamma}{1 + \gamma} \|\mu_{w,d}^t - \mu_{w,d}^{t-1}\|, \end{aligned} \quad (14)$$

which is bounded by some fraction (less than 1) of the difference between the message before and after the update  $\|\mu_{w,d}^t - \mu_{w,d}^{t-1}\|$ . Because we do not know the fixed-point  $\mu_{w,d}^*$  in (14), alternatively, we can maximize the corresponding difference  $\|\mu_{w,d}^t - \mu_{w,d}^{t-1}\|$  in order to minimize  $\|\mu_{w,d}^t - \mu_{w,d}^*\|$ . Notice that the difference is the definition of the message residual (9). Therefore, if we always update and pass messages in the descending order of residuals (9) dynamically, the FBP algorithm will converge faster to the fixed-point  $\mu^*$  than sBP [4] for learning LDA.

## 2.2 Sparse Message Passing

The message (2) takes  $K$  iterations for both update and local normalization. When the number of topics  $K$  is large, for example,  $K \geq 100$ , the total number of  $2K$  iterations is computationally large for each message. Fortunately, the message  $\mu_{w,d}(k)$  is very sparse [10], [24] when  $K$  is large. In this case, we do not need to update and normalize all  $K$ -tuple messages while retaining almost the same topic modeling accuracy. From residuals  $r_d(k)$  in (10), FBP selects only the subset of topics  $\eta\mathcal{K}_d$  with top residuals  $r_d(k)$  for message updating and passing at each learning iteration, where  $\eta \in (0, 0.5]$  is the ratio parameter provided by the user. Therefore, FBP consumes only  $2\eta K$  iterations for message update and normalization, where  $2\eta K \ll 2K$ . Obviously, the smaller the  $\eta$  the faster the FBP in practice.

Intuitively, the residual reflects the convergence speed of each message. For example,  $r_d(k) > r_d(k')$  implies that the message on the topic  $k$  converges faster than that on the topic  $k'$  at the document  $d$  in the corpus. Similarly,  $r_d > r_{d'}$  implies that the message on the document  $d$  converges faster than those on the document  $d'$ . At each learning iteration, FBP updates and passes only the subset of fast convergent messages  $\eta\mathcal{K}_d$ , and keeps the subset of slow convergent messages unchanged. Because messages in FBP converge in most cases, those top residuals will gradually become smaller after several iterations, and thus can be ranked lower by sorting  $r_d(k)$  in the descending order. As a result, those previously smaller residuals will be ranked higher for message updating and passing in later iterations. For example, in later iterations  $r_d(k') > r_d(k)$ , and the message on the topic  $k'$  will be updated and passed. In this sense, FBP keeps all uncertainties and retains almost the same accuracy as the conventional BP algorithm [4].

Fig. 1 summarizes the FBP algorithm, where  $T$  is the total number of learning iterations. At the first iteration  $t = 1$ , FBP is the same with the conventional BP that

```

input :  $\mathbf{x}_{W \times D}, K, T, \alpha, \beta, \eta$ .
output :  $\hat{\theta}, \hat{\phi}$ .
1  $\mu_{w,d}^0(k) \leftarrow$  random initialization and normalization;
2  $\hat{\phi}_w(k) \leftarrow \sum_d x_{w,d} \mu_{w,d}^0(k)$ ;
3  $\hat{\theta}_d(k) \leftarrow \sum_w x_{w,d} \mu_{w,d}^0(k)$ ;
4 for  $d \leftarrow 1$  to  $D$  do
5   for  $k \leftarrow 1$  to  $K$  do
6      $\hat{\phi}_{w,-d}(k) \leftarrow \hat{\phi}_w(k) - x_{w,d} \mu_{w,d}^0(k)$ ;
7      $\hat{\theta}_{-w,d}(k) \leftarrow \hat{\theta}_d(k) - x_{w,d} \mu_{w,d}^0(k)$ ;
8      $\mu_{w,d}^1(k) \leftarrow [\hat{\theta}_{-w,d}(k) + \alpha] \times \frac{\hat{\phi}_{w,-d}(k) + \beta}{\sum_w \hat{\phi}_{w,-d}(k) + W\beta}$ ;
9      $\mu_{w,d}^1(k) \leftarrow \mu_{w,d}^1(k) / \sum_k \mu_{w,d}^1(k)$ ;
10     $r_d^1(k) \leftarrow \sum_w x_{w,d} |\mu_{w,d}^1(k) - \mu_{w,d}^0(k)|$ ;
11     $\hat{\phi}_w(k) \leftarrow \hat{\phi}_{w,-d}(k) + x_{w,d} \mu_{w,d}^1(k)$ ;
12     $\hat{\theta}_d(k) \leftarrow \hat{\theta}_{-w,d}(k) + x_{w,d} \mu_{w,d}^1(k)$ ;
13  end
14   $\mathcal{K}_d^1 \leftarrow \text{sort}(r_d^1(k), \text{'descend'})$ ;
15   $r_d^1 \leftarrow \sum_k r_d^1(k)$ ;
16 end
17  $\mathcal{D}^1 \leftarrow \text{sort}(r_d^1, \text{'descend'})$ ;
18 for  $t \leftarrow 2$  to  $T$  do
19   for  $d \in \mathcal{D}^{t-1}$  do
20     for  $k \in \eta \mathcal{K}_d^{t-1}$  do
21        $\hat{\phi}_{w,-d}(k) \leftarrow \hat{\phi}_w(k) - x_{w,d} \mu_{w,d}^{t-1}(k)$ ;
22        $\hat{\theta}_{-w,d}(k) \leftarrow \hat{\theta}_d(k) - x_{w,d} \mu_{w,d}^{t-1}(k)$ ;
23        $\mu_{w,d}^t(k) \leftarrow [\hat{\theta}_{-w,d}(k) + \alpha] \times \frac{\hat{\phi}_{w,-d}(k) + \beta}{\sum_w \hat{\phi}_{w,-d}(k) + W\beta}$ ;
24        $\mu_{w,d}^t(k) \leftarrow \frac{\mu_{w,d}^t(k)}{\sum_k \mu_{w,d}^t(k)} \times \sum_k \mu_{w,d}^{t-1}(k)$ ;
25        $r_d^t(k) \leftarrow \sum_w x_{w,d} |\mu_{w,d}^t(k) - \mu_{w,d}^{t-1}(k)|$ ;
26        $\hat{\phi}_w(k) \leftarrow \hat{\phi}_{w,-d}(k) + x_{w,d} \mu_{w,d}^t(k)$ ;
27        $\hat{\theta}_d(k) \leftarrow \hat{\theta}_{-w,d}(k) + x_{w,d} \mu_{w,d}^t(k)$ ;
28     end
29      $\mathcal{K}_d^t \leftarrow \text{sort}(r_d^t(k), \text{'descend'})$ ;
30      $r_d^t \leftarrow \sum_k r_d^t(k)$ ;
31   end
32    $\mathcal{D}^t \leftarrow \text{sort}(r_d^t, \text{'descend'})$ ;
33   if  $|\mathcal{P}^t - \mathcal{P}^{t-1}| \leq 1$  then break;
34 end

```

Fig. 1. The FBP algorithm for LDA.

updates and normalizes all messages for all topics (lines 1-17). The only difference is the computation of residuals  $r_d(k)$  and  $r_d$ , and the sort of residuals to get the descending order  $\mathcal{K}_d$  and  $\mathcal{D}$ , respectively. For  $2 \leq t \leq T$ , based on the descending order  $\mathcal{K}_d$  and  $\mathcal{D}$ , FBP selects the subset  $\eta \mathcal{K}_d$  topics for message updating and passing (lines 18-32). The message normalization for the the subset topics  $k \in \eta \mathcal{K}_d$  is

$$\hat{\mu}_{w,d}^t(k) = \frac{\mu_{w,d}^t(k)}{\sum_k \mu_{w,d}^t(k)} \times \sum_k \mu_{w,d}^{t-1}(k), k \in \eta \mathcal{K}_d, \quad (15)$$

where  $\hat{\mu}_{w,d}^t(k)$  and  $\mu_{w,d}^{t-1}$  are the normalized message in the current and previous iterations, and  $\mu_{w,d}^t(k)$  is the unnormalized message according to (2). In this way, we need only  $\eta K$  iterations for local message normalization and avoid calculating the global normalization factor  $Z = \sum_k \mu_{w,d}(k)$  with  $K$  iterations. Notice that we dynamically find the best ordering  $\mathcal{K}_d^t$  and  $\mathcal{D}^t$  to locate

the fast convergent messages after each iteration (lines 29 and 32). Finally, at the end of each iteration, we check if FBP converges in order to break the loop (line 33). In this paper, we terminate FBP if the difference of training perplexity [4],

$$\mathcal{P} = \exp \left\{ - \frac{\sum_{w,d} x_{w,d} \log [\sum_k \theta_d(k) \phi_w(k)]}{\sum_{w,d} x_{w,d}} \right\}, \quad (16)$$

of two successive iterations is less than one, because the training perplexity will decrease very little in the later iterations for convergence.

The time complexity of FBP is  $\mathcal{O}(\eta KDT)$ , where  $K$  is the number of topics,  $D$  the number of documents, and  $T$  the number of iterations to convergence. Compared with other batch LDA algorithms such as VB [2], GS [3] and BP [4], the time complexity of FBP is scaled linearly by  $\eta \in (0, 0.5]$ ; therefore FBP is much faster than VB, GS and BP especially when the number of topics  $K$  is large. Compared with other sparse strategies like fast Gibbs sampling (FGS) [24] and sparse Gibbs sampling (SGS) [10], FBP can control the balance of speed and accuracy by the ratio parameter  $\eta$ . Intuitively, the smaller  $\eta$  would lead to a faster speed but a relatively lower accuracy. However, our experiments have confirmed that  $\eta = 0.1$  is enough to achieve almost the same topic modeling accuracy as sBP [4] when  $K \geq 100$ .

### 3 ONLINE BELIEF PROPAGATION

Since FBP is a batch LDA algorithm, it cannot process big data streams owing to high memory costs and slow computation speed. In this section, we combine FBP with the online stochastic optimization method [22] referred to as OBP, which can converge to a stationary point of the LDA joint probability (1).

OBP decomposes the document-word matrix into a sequence of  $M = \lfloor D/S \rfloor$  mini-batches, i.e.,  $\mathbf{x}_{W \times D} = \{\mathbf{x}_{W \times S}^1, \dots, \mathbf{x}_{W \times S}^m, \dots, \mathbf{x}_{W \times S}^M\}$ , where  $\lfloor \cdot \rfloor$  is the floor operation. In each mini-batch, there are  $1 \leq s \leq S$  documents. When the data stream flows to the unseen mini-batch  $\mathbf{x}_{W \times S}^m$ , all current online LDA algorithms [8]–[15] aim to maximize the joint probability  $p(\mathbf{x}_{W \times S}^m, \mathbf{z}_{W \times S}^m | \hat{\phi}_w^{m-1}(k), \alpha, \beta)$  of unseen documents conditioned on the previous topic distribution  $\hat{\phi}_w^{m-1}(k)$ . To maximize this conditional joint probability, OBP first randomly initialize and normalize the messages  $\mu_{w,s}^m$  for the unseen documents  $x_{w,s}^m$ , and then update the topic distribution  $\hat{\phi}_w^m(k)$ ,

$$\hat{\phi}_w^m(k) = \hat{\phi}_w^{m-1}(k) + \sum_s x_{w,s}^m \mu_{w,s}^m, \quad (17)$$

where  $\hat{\phi}_w^{m-1}(k)$  is the topic distribution of the previous mini-batch. Similarly, the document-specific topic proportion for unseen documents is initialized as

$$\hat{\theta}_s^m(k) = \sum_w x_{w,s}^m \mu_{w,s}^m. \quad (18)$$

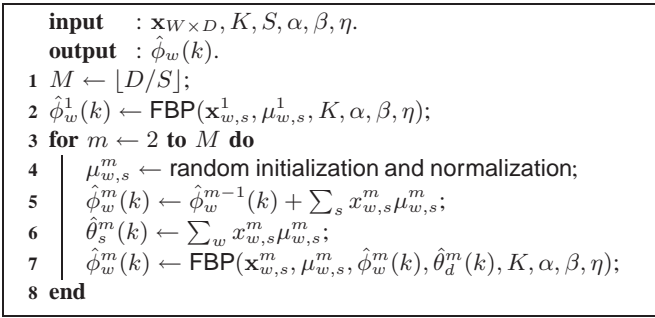


Fig. 2. The OBP algorithm for LDA.

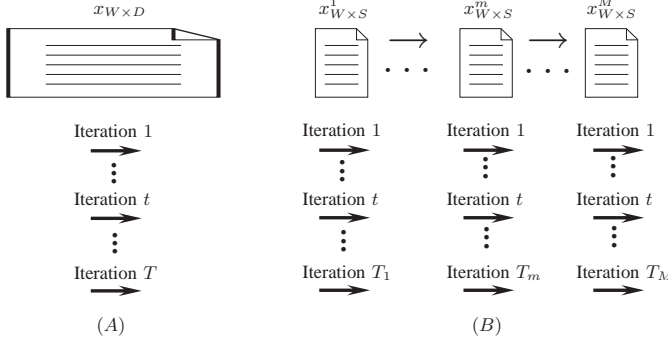


Fig. 3. (A) FBP and (B) OBP algorithms for learning LDA.

Using  $\{\hat{\phi}^m, \hat{\theta}^m, \mu^m\}$  as initial values, OBP runs FBP as shown in Fig. 1 until convergence. Notice that in OBP settings, FBP fixes  $\hat{\phi}_w^{m-1}(k)$ , and updates only messages  $\mu^m$  for the current mini-batch  $\mathbf{x}^m$  in (17). Because the previous topic distribution  $\hat{\phi}_w^{m-1}(k)$  provides the gradient descent for the message update in (2), FBP uses significantly less number of iterations  $T_m$  until convergence. Since the batch FBP maximizes the joint probability  $p(\mathbf{x}, \mathbf{z} | \alpha, \beta)$  of LDA, OBP can maximize the conditional joint probability  $p(\mathbf{x}^m, \mathbf{z}^m | \hat{\phi}^{m-1}, \alpha, \beta)$  for each unseen mini-batch. Moreover, OBP can detect topic shifts using (17), where  $\hat{\phi}_w^{m-1}(k)$  is the topic distribution of the  $m-1$ th mini-batch, and  $\sum_s x_{w,s}^m \mu_{w,s}^m$  is the topic shift contributed by the  $m$ th mini-batch.

Fig. 2 summarizes the OBP algorithm for learning LDA. For the first mini-batch, we run FBP to obtain the initial topic distribution  $\hat{\phi}_w^1(k)$  (line 2). For  $2 \leq m \leq M$  mini-batches, OBP uses FBP to re-estimate the  $m$ th topic distribution  $\hat{\phi}_w^m(k)$  to convergence (line 7) after random initialization of messages and parameters for the previously unseen mini-batch  $\mathbf{x}^m$  (lines 4-6). OBP from Fig. 2 reduces to FBP (Fig. 1) if  $S = D$ . Fig. 3 illustrates the difference between FBP and OBP. In Fig. 3A, FBP scans the entire document-word matrix  $\mathbf{x}_{W \times D}$  by a total of  $T$  iterations until convergence. In contrast, OBP (Fig. 3B) scans each mini-batch of sub-matrix  $\mathbf{x}_{W \times S}^m$  sequentially by a total of  $T_m$  iterations until convergence. Because OBP fixes the previous topic distribution  $\hat{\phi}^{m-1}$ , and only updates messages  $\mu_{w,s}^m$  for the unseen documents  $x_{w,s}^m$ , it uses significantly less number of iterations until convergence, i.e.,  $T_m \ll T$ . As a result, to extract topics from the

entire document-word matrix, OBP is much faster than FBP. The time complexity of OBP is  $\mathcal{O}(\eta K D T_m)$ , which is much smaller than FBP's  $\mathcal{O}(\eta K D T)$  because  $T_m \ll T$ . The space complexity of OBP is  $\mathcal{O}(SK)$ , which is also much smaller than FBP's  $\mathcal{O}(DK)$  because  $S \ll D$ .

### 3.1 Analysis of Convergence

In this subsection, we show that OBP in Fig. 2 converges to a stationary point of the joint probability  $p(\mathbf{x}, \mathbf{z} | \alpha, \beta)$  of LDA. First, FBP in Fig. 1 can be viewed as a batch gradient descent algorithm that computes the average of gradients or messages (2) to estimate the topic distribution (6). Each iteration of FBP involves a burden of computing the average gradient over the entire document-word matrix  $\mathbf{x}_{W \times D}$ . To relieve this burden, OBP computes the online gradient descent  $\mu_{w,s}^m$  over the small mini-batch  $x_{w,s}^m$  to estimate the topic distribution (17). More specifically, we can re-write (17) as

$$\hat{\phi}_w^m(k) = \hat{\phi}_w^{m-1}(k) + \frac{1}{m-1} \Delta \hat{\phi}_w^m(k), \quad (19)$$

where the notation  $\Delta \hat{\phi}_w^m$  denotes the online gradient descent  $\sum_s x_{w,s}^m \mu_{w,s}^m$  that updated by FBP in Fig. 2. Eq. (19) has a learning rate  $1/(m-1)$  because  $\hat{\phi}_w^{m-1}(k)$  accumulates messages of previous  $m-1$  mini-batches, and  $\Delta \hat{\phi}_w^m(k)$  accumulates only messages of the current mini-batch. Since this learning rate satisfies the following two conditions,

$$\sum_{m=2}^{\infty} \frac{1}{m-1} = \infty, \quad (20)$$

$$\sum_{m=2}^{\infty} \frac{1}{(m-1)^2} < \infty, \quad (21)$$

the online stochastic learning theory [22] shows that  $\hat{\phi}_w^m(k)$  will converge to a stationary point of the LDA objective function (1), and the gradient  $\Delta \hat{\phi}_w^m(k)$  will converge to 0 when  $m \rightarrow \infty$ .

Fig. 4 shows the hypergraph [26] representation for the online LDA model. For each mini-batch  $x_{w,s}^m$ , there is a collapsed LDA model represented by three hyperedges  $\{\hat{\theta}_s^m, \hat{\phi}_w^m, \hat{\gamma}_k^m\}$  denoted by yellow, green and red rectangles, which correspond to the three terms of the joint probability (1), respectively. For example, the hyperedge  $\hat{\phi}_w^m$  describes the dependencies between the topic label  $z_{w,s}^{m,k}$  and its neighboring topic labels  $z_{w,-s}^{m,k}$ , and it corresponds to the second term of the joint probability (1). The notation  $-s$  means all document indices in the  $m$ th mini-batch excluding  $s$ . The online LDA model uses the hyperedge (the blue rectangle) to describe the dependencies between the successive hyperedges  $\hat{\phi}_w^{m-1}$  and  $\hat{\phi}_w^m$ , corresponding to the online gradient descent (19). For the  $m$ th mini-batch, we use the FBP to infer the topic message of the variable  $z_{w,s}^{m,k}$  using (2). The dependency (19) between two successive mini-batches  $m-1$  and  $m$  is denoted by the blue hyperedge as shown in Fig. 4. Since the  $m$ th mini-batch

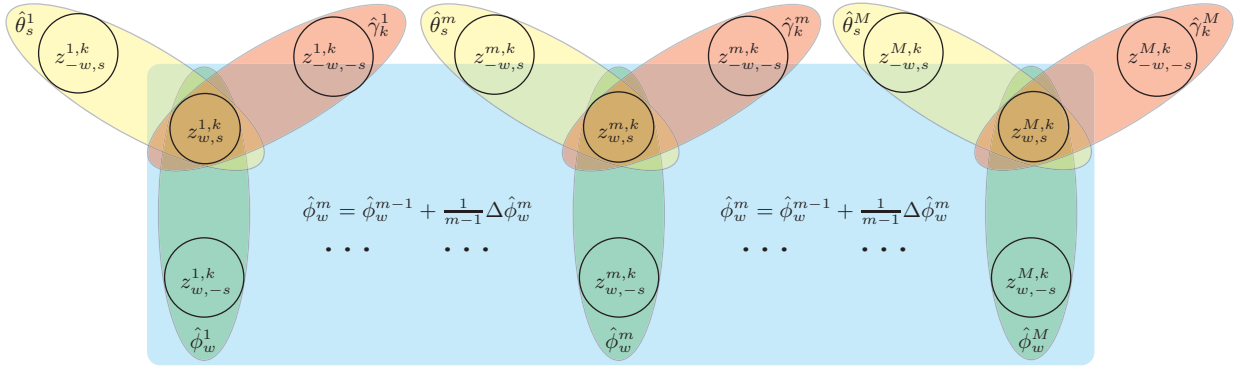


Fig. 4. The hypergraph representation for the online LDA model.

depends only on the  $m - 1$ th mini-batch, the online LDA model follows the first-order Markov assumption that has been widely used to model time series [27].

### 3.2 Relationship to Previous Algorithms

Online LDA algorithms infer topics from unseen documents in the data stream. However, inference for unseen documents has been already discussed in batch LDA algorithms [4], [7]. The predictive perplexity  $\mathcal{P}$  on an unseen test set is a widely used performance measure to evaluate different batch LDA algorithms. To calculate the predictive perplexity, we fix the topic distribution  $\phi_w(k)$  estimated from the training set, and run batch LDA algorithms to estimate  $\theta_s(k)$  for 80% unseen test documents. The predictive perplexity on unseen documents is

$$\mathcal{P} = \exp \left\{ - \frac{\sum_{w,d} x_{w,d}^{20\%} \log [\sum_k \theta_d(k) \phi_w(k)]}{\sum_{w,d} x_{w,d}^{20\%}} \right\}, \quad (22)$$

where  $x_{w,d}^{20\%}$  is the word counts for the remaining 20% unseen test documents.

Similar to OBP, OVB [13] also integrates VB [2] with the online stochastic learning framework [22]. It uses the following topic distribution update equation,

$$\hat{\phi}_w^m = (1 - \rho_m) \hat{\phi}_w^{m-1} + \rho_m \Delta \hat{\phi}_w^m, \quad (23)$$

$$\rho_m = (\tau_0 + m)^{-\kappa}, \quad (24)$$

where  $\tau_0$  and  $\kappa$  are parameters provided by users. Since the learning rate  $\sum_{m=1}^{\infty} \rho_m = \infty$  and  $\sum_{m=1}^{\infty} \rho_m^2 < \infty$ , the analysis shows that OVB can converge to the objective function of VB. Indeed, OVB's learning rate  $\rho_m$  is similar to OBP's learning rate  $(m - 1)^{-1}$  when  $\tau_0 = 0$  and  $\kappa = 1$ . From this perspective, the major difference between OBP and OVB is that the former is derived from FBP and the latter is derived from VB. Another difference is that OVB finishes scanning the mini-batch when the convergence of  $\hat{\theta}_s(k)$  is achieved in VB [13], while OBP uses the training perplexity (16) as the convergence criterion. The residual VB (RVB) algorithm [14], [15] is an important improvement of OVB. Through dynamically scheduling the order of mini-batches based on residuals, RVB is slightly faster and more accurate than OVB. OGS is

TABLE 1  
Statistics of four document data sets.

Data sets	$D$	$W$	Batch	Online	Test
ENRON	39861	28102	37861	37861	2000
WIKI	20758	83470	10000	19000	1000
NYTIMES	300000	102660	15000	290000	10000
PUBMED	8200000	141043	80000	8160000	40000

derived from the sparse GS (SGS) [10]. We find that the topic distribution update equation for unseen documents is almost the same with (19). So, OGS can also converge to the stationary point of the LDA objective function within the online stochastic optimization framework [22]. Sampled online inference (SOI) [12] explicitly combines SGS with the scalability of online stochastic inference [28]. Experiments show that SOI is around twice faster than OVB. The major difference between OGS/SOI and OBP is that OGS/SOI is built on SGS but OBP uses FBP to compute online gradient descents.

## 4 EXPERIMENTS

The experiments are carried out on the four publicly available data sets [24]: ENRON, WIKI<sup>1</sup>, NYTIMES and PUBMED in Table 1, where  $D$  is the total number of documents and  $W$  is the vocabulary size. We randomly reserve a small proportion of documents as "Test" set, and uses the remaining documents as the "Online" training set. Due to memory limits for batch LDA algorithms, we randomly selects a subset of documents as "Batch" from the "Online" training set. Since ENRON is a relatively smaller data set, both "Batch" and "Online" contain the same number of documents. All experiments are run on the Sun Fire X4270 M2 server with two 6-core 3.46 GHz CPUs and 128 GB RAM. We use the training perplexity (16) and the predictive perplexity (22) as performance measures, which have been widely used in previous works [2], [4], [7], [13], [24], [29]. Generally, the lower predictive perplexity on the test set the better generalization ability. In all experiments, we fix the hyperparameters  $\alpha = \beta = 0.01$ .

1. [http://en.wikipedia.org/wiki/Data\\_set](http://en.wikipedia.org/wiki/Data_set)

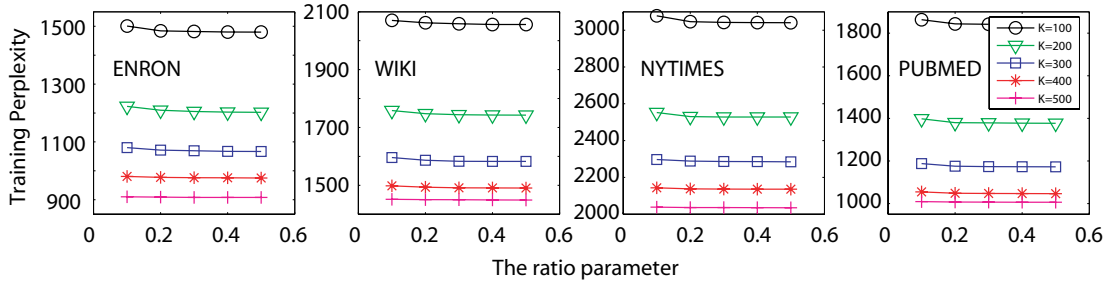


Fig. 5. Training perplexity as a function of the ratio parameter  $\eta$  when  $K \in \{100, 200, 300, 400, 500\}$ .

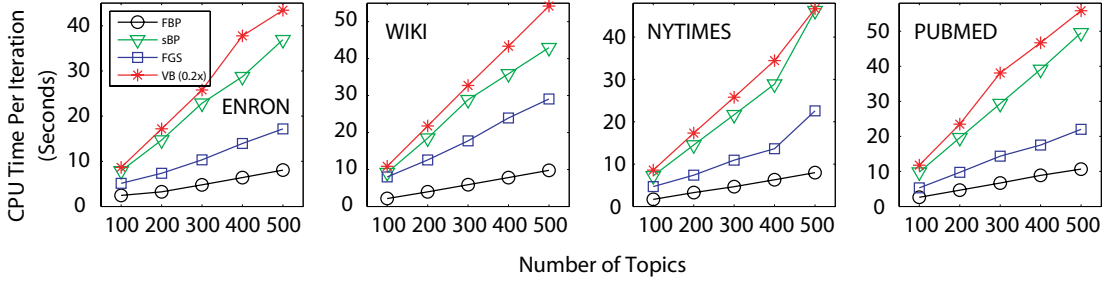


Fig. 6. CPU time per iteration as a function of the number of topics  $K$ .

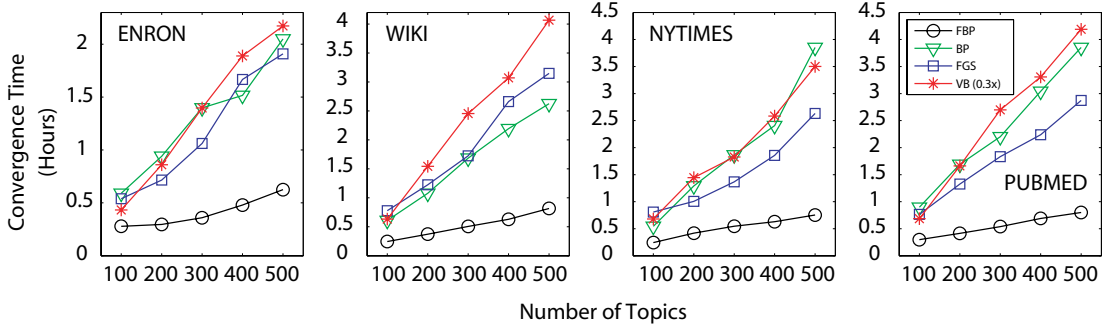


Fig. 7. Convergence time as a function of the number of topics  $K$ .

#### 4.1 Fast Belief Propagation (FBP)

We compare the convergence speed of FBP with that of other state-of-the-art batch LDA algorithms, including FGS [24], sBP [4] and VB [2]. FGS can be viewed as a fast surrogate of the conventional GS algorithm [3]. For a fair comparison, we implement all algorithms using the MEX C++/MATLAB R2010a 64-bit platform, which have been made publicly available [30]. We use the training perplexity (16) as the convergence criterion. If the training perplexity difference between two successive training iterations is less than one, the algorithm will be terminated. Fixing the estimated topic distributions  $\hat{\phi}$ , we calculate the predictive perplexity (22) on the test set to evaluate the topic modeling accuracy.

First, we examine the ratio parameter  $\eta$  in FBP. Fig. 5 shows the training perplexity as a function of  $\eta \in \{0.1, 0.2, 0.3, 0.4, 0.5\}$  when  $K \in \{100, 200, 300, 400, 500\}$ . Obviously, there is no big difference when  $\eta = 0.1$  and  $\eta = 0.5$  especially when  $K = 500$ . This phenomenon shows that only a small subset of topics play the role when  $K$  is very large. Such a sparse property has been

also used to speed up GS for training LDA recently [10], [24]. Further study shows that when  $\eta \geq 0.3$  FBP achieves even a slightly lower perplexity than the sBP algorithm. The major reason is that FBP converges faster than sBP to the lower perplexity. Notice that the learning time of FBP still scales linearly with  $K$ . When  $K$  is very large such as  $K \geq 2000$ ,  $\eta K_d$  may be a constant, e.g.,  $\eta K_d = 50$ . In this case, the learning time of FBP is independent of  $K$ . This hypothesis,  $\eta K_d = 50$ , is reasonable because usually a common word cannot be allocated to more than 50 topics. Users may set different  $\eta$  for different speedup effects. To pursue the maximum speedup and to retain a comparable accuracy, we choose  $\eta = 0.1$  in the rest of our experiments.

Fig. 6 shows the CPU time per iteration as a function of  $K$  for FBP, FGS, sBP and VB. The learning time of all algorithms increases linearly with  $K$ . When  $\eta = 0.1$ , FBP in theory requires only 1/10 learning time of sBP per iteration. However, FBP needs to sort and update residuals so that it on average consumes around 1/5 learning time of sBP per iteration. Similar to FBP, FGS

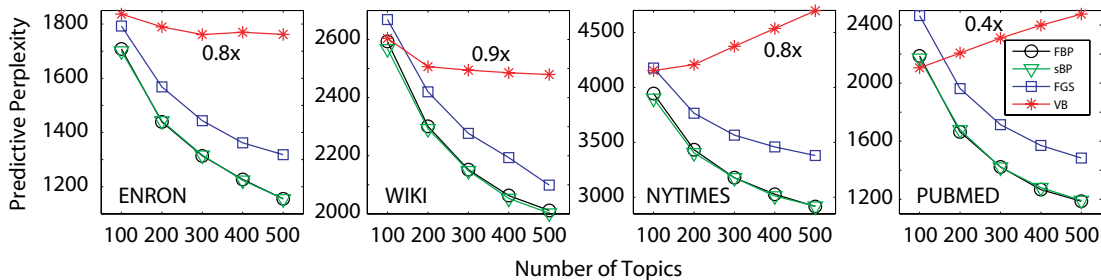


Fig. 8. Predictive perplexity as a function of the number of topics  $K$ .

also benefits from the sparse message passing process. But FGS also needs to update the upper bound of the local normalization factor of messages [24], and is slower by a factor of around  $2 \sim 3$  than FBP. Although SGS [10] is around twice faster than FGS, it is still slower than FBP per iteration according to the same benchmark FGS. In addition, FBP can be even faster by applying a smaller  $\eta$  when  $K$  is very large. Finally, VB is slowest due to the complicated digamma function computation [4], [7]. For a better illustration, we multiply VB’s learning time per iteration by 0.2 denoted by  $0.2x$ . In conclusion, Fig. 6 confirms that FBP is at present one of the fastest batch LDA algorithms when  $K \geq 100$ .

Fig. 7 shows the convergence time of FBP, FGS, sBP and VB. Because FGS is a MCMC technique, it consumes more iterations for convergence. FGS’s convergence time is comparable with that of sBP. Although VB uses the least number of iterations for convergence, it still has the longest convergence time largely attributed to the longest CPU time per iteration. For a better illustration, we multiply VB’s convergence time by 0.3 denoted by  $0.3x$ . Consistent with Fig. 6, FBP is the fastest algorithm to convergence, and is around 3 times more faster than FGS and sBP. This fast convergence speed will be beneficial to the OBP algorithm. However, even for the small subset of PUBMED training data set in Table 1, FBP still requires around 0.8 hour to convergence when  $K = 500$ , which means that FBP will use approximately 80 hours to scan the entire PUBMED data set when  $K = 500$  even if there were enough memory available. Similarly, FGS, sBP and VB will take around 290, 385 and 1400 hours respectively to accomplish the same task, respectively. Such a time- and memory-consuming batch process motivates the fast OBP algorithm that requires a constant memory space.

Fig. 8 shows the predictive perplexity of FBP, FGS, sBP and VB. We see that the predictive perplexity of FBP overlaps that of sBP, which demonstrates that by passing only the messages of the 10% subset of topics can achieve the same topic modeling accuracy as sBP. FGS is worse than both FBP and sBP by around  $5\% \sim 15\%$ , partly because FGS uses the sampling technique without keeping all uncertainties in the message [4]. VB performs the worst and shows an overfitting phenomenon, where the predictive perplexity increases with the number of

topics on NYTIMES and PUBMED data sets. For visual clarity, we multiply VB’s perplexity by 0.8, 0.9, 0.8 and 0.4 on four data sets, respectively. Because VB optimizes an approximate variational distribution to the joint distribution of LDA (1), it introduces biases in variational message passing. The experimental results show that such biases cannot be ignored when the number of topics  $K$  is large on NYTIMES and PUBMED data sets. However, the proper setting of hyperparameters can correct the biases in VB [7]. As a summary, FBP converges fastest with the highest topic modeling accuracy among several state-of-the-art batch LDA algorithms.

## 4.2 Online Belief Propagation (OBP)

We compare OBP with two state-of-the-art online LDA algorithms including OGS [10] and OVB [13]. All algorithms are also publicly available [30]. For OVB, we use its default parameters  $\tau_0 = 1024$  and  $\kappa = 0.5$  in (24) [13].

First, we study the mini-batch size  $S$  in three online LDA algorithms. For three relatively smaller data sets ENRON, WIKI and NYTIMES, we examine  $S = \{256, 512, 1024, 2048, 4096\}$ . For the relatively larger data set PUBMED, we test  $S = \{1024, 2048, 4096, 8192, 16384\}$ . Fig. 9 shows the training time as a function of mini-batch size  $S$  in log-scale when  $K = 100$ . OVB is faster than OGS partly because OVB uses the convergence of the variational parameter  $\hat{\theta}$  as the termination condition for each mini-batch. Although this convergence criterion makes OVB faster, it also leads to the worse predictive ability of OVB in Fig. 10. We see that the learning time of OGS and OBP increases slightly with the mini-batch size  $S$ . The reason is that when  $S \rightarrow D$ , OGS and OBP reduce to SGS and FBP for longer convergence time. In contrast, OVB’s training time decreases on ENRON, WIKI and NYTIMES data sets when  $S$  increases. The major reason is that OVB converges with almost the same number of iterations for smaller  $S$ . When  $S$  increases, OVB will scan few mini-batches. When  $S$  becomes larger on PUBMED data set, OVB’s training time first decreases and then increases as  $S$  increases.

Fig. 10 shows the predictive perplexity as a function of mini-batch size  $S$  when  $K = 100$ . Both OGS and OBP lower the perplexity value when  $S$  increases, because larger mini-batch sizes will lead to more robust online gradient descent for higher topic modeling accuracy.



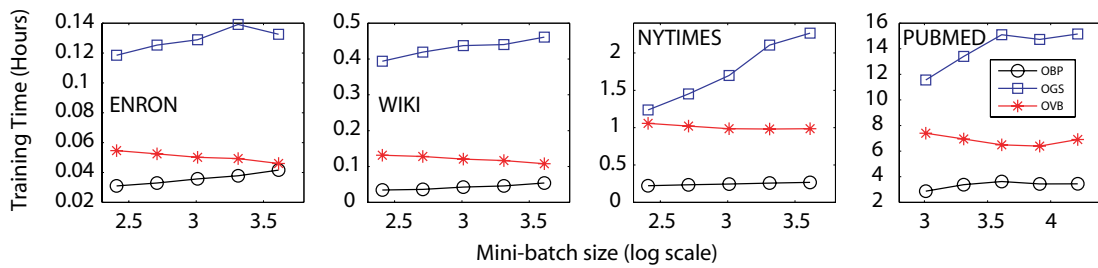


Fig. 9. Learning time as a function of the mini-batch size  $S$  (log-scale) when  $K = 100$ .

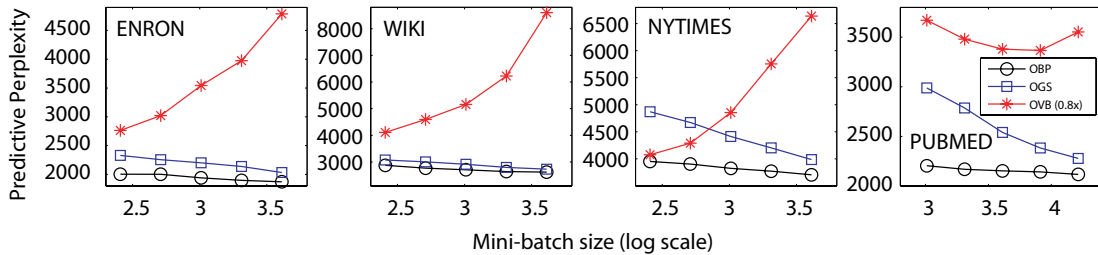


Fig. 10. Predictive perplexity as a function of the mini-batch size  $S$  (log-scale) when  $K = 100$ .

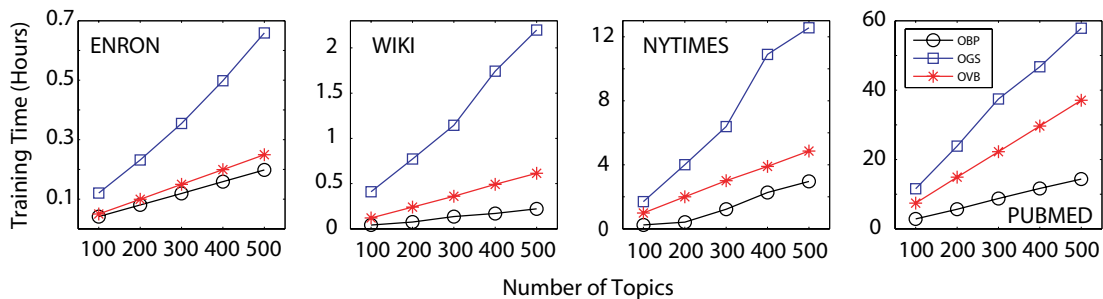


Fig. 11. Training time as a function of the number of topics  $K$ .

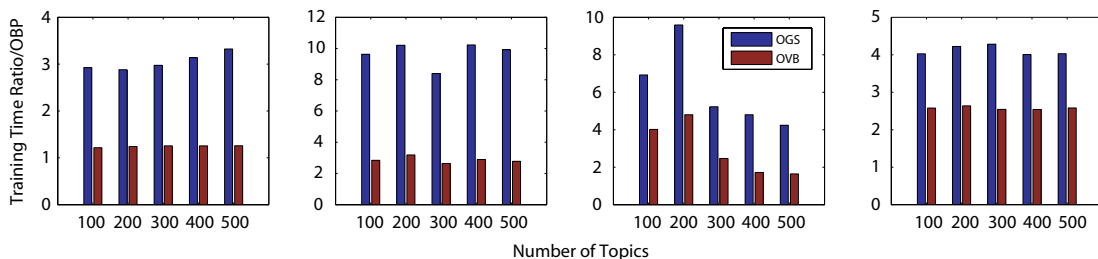


Fig. 12. Learning time ratio: (OGS, OVB)/OBP. The higher value the slower speed.

However, OVB performs worse when the mini-batch size increases. According to the analysis in OVB [13], this phenomenon may be attributed to the approximate objective function of VB. Online gradient descents based on small mini-batches may correct biases of the global gradient descent of VB. Following OVB [13], to balance speed and topic modeling accuracy, we choose  $S = 1024$  in the rest of experiments.

Fig. 11 shows the training time as a function of the number of topics  $K$ . OBP, OGS and OVB use around 14, 58 and 37 hours to scan the entire PUBMED data set when  $K = 500$ . The online learning time is significantly shorter than that of the corresponding batch algorithms.

For example, OBP uses approximately 15% training time needed for FBP to scan the entire PUBMED data set. Among the three online LDA algorithms, OGS is the slowest because its MCMC sampling nature for slow convergence. OBP is faster than OVB partly because it is derived from the fast convergent FBP confirmed in Fig. 7. Another reason is that OBP uses the sparse message passing method for a large number of topics.

Fig. 12 shows the training time ratio over OBP. We see that OBP is around twice faster than OVB, and is 4 ~ 10 times faster than OGS especially on the relatively larger data sets NYTIMES and PUBMED. Recently, RVB [14], [15] and SOI [12] are two important improvements over

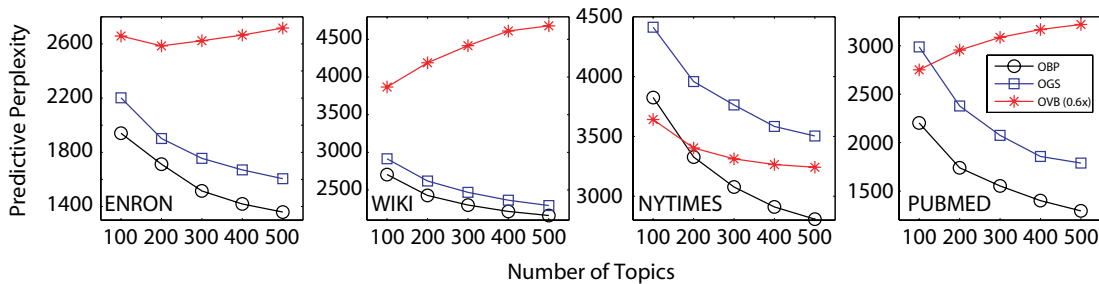


Fig. 13. Predictive perplexity as a function of the number of topics  $K$ .

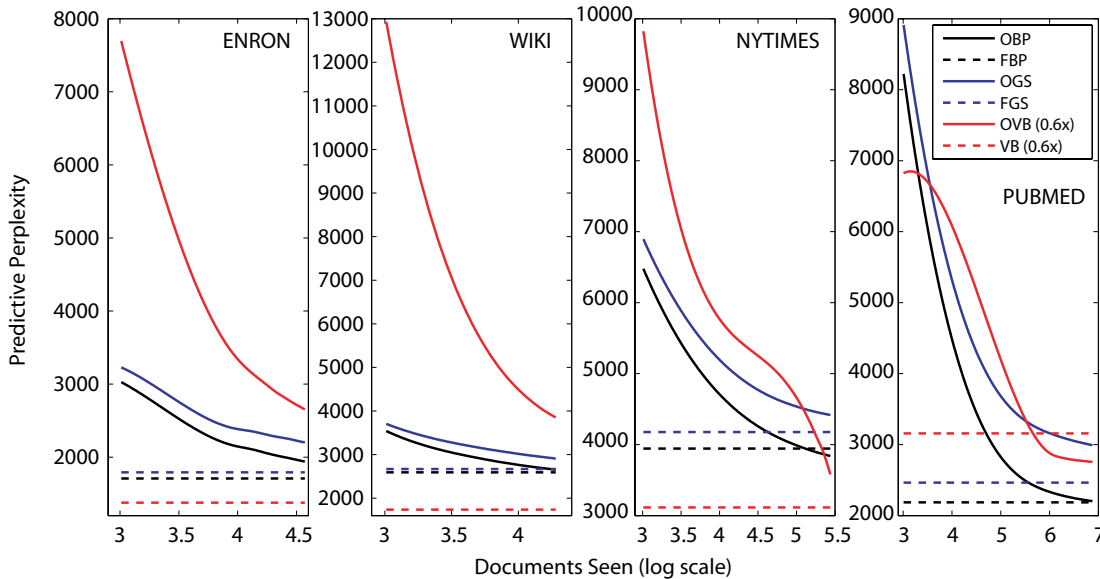


Fig. 14. Predictive perplexity as a function of seen documents (log-scale) when  $K = 100$ .

OVB and OGS, respectively. Although RVB [14], [15] converges faster to a lower predictive perplexity than OVB, it still requires slightly more training time than OVB to scan all mini-batches because of additional scheduling costs. SOI [12] speeds up OVB by a factor of 2, but it is still comparable or even slower than OBP according to the same OVB benchmark. Therefore, OBP is very competitive in speed to scan big data streams.

Fig. 13 shows the predictive perplexity as a function of the number of topics  $K$ . Consistent with Fig. 8, OBP has the highest topic modeling accuracy. For example, OBP is 15%  $\sim$  40% better than OGS for different topics. OVB still performs the worst and shows the overfitting phenomenon when  $K$  increases on WIKI and PUBMED data sets. For visual clarity, we multiply OVB’s perplexity by 0.6 denoted by  $0.6x$ . Even if OVB is faster than OGS, its accuracy is far from that of OGS due largely to the approximate objective function of VB that leads to the inaccurate OVB algorithm. As the OVB extension, RVB [14], [15] also suffers the same problem. Because SOI is derived from SGS [10], its accuracy is comparable with OGS that yields higher predictive perplexity than OBP. Together with Fig. 11, we may reasonably conclude that OBP is one of the fastest online LDA algorithms and achieves high topic modeling accuracy for big data

streams.

Fig. 14 shows the predictive perplexity as a function of seen documents (log-scale) when  $K = 100$ . We see that OBP, OGS and OVB can converge to a stationary point by scanning more mini-batches. We also show the predictive perplexity of FBP, FGS and VB as a comparison. Notice that the predictive perplexity of VB and OVB is multiplied by 0.6 denoted by  $0.6x$ . For the ENRON data set, “Batch” and “Online” training sets are the same in Table 1. We see that online algorithms cannot converge to the same perplexity of batch algorithms using the same training set. One reason is that the batch gradient descent is more accurate than the online gradient descent in case of the same training data. When more training data are used such as WIKI, NYTIMES and PUBMED data sets, OBP can converge to almost the same or even lower predictive perplexity than FBP. Similarly, OVB also converges to a lower perplexity than VB on the PUBMED data set. However, OGS always has a gap with FGS in terms of the predictive perplexity partly because OGS uses sampled word counts to compute the online gradient descent, which causes more stochastic noises [28]. Fig. 14 shows that OBP in practice can converge to the stationary point of the LDA objective function by a series of online gradient descents (19). This

Documents Seen	1024	3072	5120	7168	9216	11264	13312	15360	17408	19456
Topic 1	system user softwar data comput file includ develop web design	system user data softwar comput file includ develop program design	system user comput data softwar file program includ design develop	system user data comput softwar program includ file design develop	system user comput data softwar program includ file design develop	system user comput data softwar program includ file develop design	system user comput data softwar program includ file develop design	system user comput data softwar program includ file develop design	system user comput data softwar program includ file develop design	system user comput data softwar program includ file develop network
Topic 2	water earth diamond air light eleph speci power includ lion	water earth light air time power system includ fuel anim	water earth energi power light time system includ air electr	water earth energi power time light system includ air plant	water energi earth power system time light air electr includ	water earth energi power light system time electr engin air	water energi earth power light system time electr engin air	water energi earth power light system time electr engin produc	water energi power earth light system time electr engin produc	water energi power earth light system time electr engin air
Topic 3	music art band record song artist album perform paint style	music art band record album song artist perform paint includ	music art band album record song album artist perform paint style	music art record band song album artist perform style paint	music art record band song album artist perform style includ	music record art band song album artist perform style includ	music record art band album song artist perform style includ	music record art album band song artist perform style includ	music record art song album band artist perform style includ	music record art album song band artist perform style paint

Fig. 15. Topic shifts of OBP as seen documents increase on the WIKI data set.

results is consistent with our convergence analysis in the subsection 3.1. Obviously, OBP converges the fastest among all the three online LDA algorithms.

Fig. 15 illustrates an example of topic shifts detected by OBP on the WIKI data set. We set the number of topics,  $K = 10$ , and show top ten words from three topics in Fig. 15. Topic 1 is about “system and software”. When  $D = 1204$ , the word “program” is not in the top ten words. Gradually, when  $D = 3072$  and  $5120$ , the word “program” is ranked higher in this topic. Similarly, the word “computer” becomes important in this topic as seen documents increase. The word “network” first appears in this topic when  $D = 19456$ . On the other hand, the word “file” becomes unimportant as more documents are scanned. Topic 2 is a “water” related topic. When  $D = 1024$  and  $3072$ , the word “lion” and “animal” are included in this topic. With more documents seen, “water” is closely related with “energy”, “power” and “electricity”, which implies more and more documents focus on water’s energy property. Topic 3 is on “music”. We see that the word “band” is ranked lower and lower as more documents have been seen. Two words “record” and “album” become more and more important in this topic. The ranking of most top words becomes stable when  $D = 19456$ , which implies that the topic distribution converges to a stationary point. More generally, if we organize the data stream in the chronological order, OBP can detect the topic evolution as data stream flows.

## 5 CONCLUSIONS

This paper presents a novel OBP algorithm for learning LDA, which combines the fast convergent batch FBP algorithm with the online stochastic optimization framework. Not only can OBP time- and memory-efficiently process big text streams, but also can detect dynamic topic shifts as the data streams flow. OBP can converge to the stationary point of LDA objective function. Extensive experiments confirm that OBP is superior to the state-of-the-art OGS [10] and OVB [13] algorithms in terms of both speed and accuracy. To pursue further speedup effects, we may extend OBP on the parallel architectures [16], [19], [31]. With the communication-efficient parallel topic modeling techniques, we can analyze multiple data streams simultaneously, and find topic shifts and interactions among these data streams.

## ACKNOWLEDGEMENTS

This work is supported by NSFC (Grant No. 61003154), Natural Science Foundation of the Jiangsu Higher Education Institutions of China (Grant No. 12KJA520004), a grant from Baidu to JZ, and a GRF grant from RGC UGC Hong Kong (GRF Project No.9041574) and a grant from City University of Hong Kong (Project No. 7008026) to ZQL.

## REFERENCES

- [1] D. M. Blei, "Introduction to probabilistic topic models," *Communications of the ACM*, pp. 77–84, 2012.
- [2] D. M. Blei, A. Y. Ng, and M. I. Jordan, "Latent Dirichlet allocation," *J. Mach. Learn. Res.*, vol. 3, pp. 993–1022, 2003.
- [3] T. L. Griffiths and M. Steyvers, "Finding scientific topics," *Proc. Natl. Acad. Sci.*, vol. 101, pp. 5228–5235, 2004.
- [4] J. Zeng, W. K. Cheung, and J. Liu, "Learning topic models by belief propagation," *IEEE Trans. Pattern Anal. Mach. Intell.*, p. arXiv:1109.3437v4 [cs.LG], 2011.
- [5] A. P. Dempster, N. M. Laird, and D. B. Rubin, "Maximum likelihood from incomplete data via the EM algorithm," *Journal of the Royal Statistical Society, Series B*, vol. 39, pp. 1–38, 1977.
- [6] J. Winn and C. M. Bishop, "Variational message passing," *J. Mach. Learn. Res.*, vol. 6, pp. 661–694, 2005.
- [7] A. Asuncion, M. Welling, P. Smyth, and Y. W. Teh, "On smoothing and inference for topic models," in *UAI*, 2009, pp. 27–34.
- [8] A. Banerjee and S. Basu, "Topic models over text streams: A study of batch and online unsupervised learning," in *SIAM Data Mining*, 2007, pp. 437–442.
- [9] L. AlSumait, D. Barbará, and C. Domeniconi, "On-line LDA: Adaptive topic models for mining text streams with applications to topic detection and tracking," in *ICDM*, 2008, pp. 3–12.
- [10] L. Yao, D. Mimno, and A. McCallum, "Efficient methods for topic model inference on streaming document collections," in *KDD*, 2009, pp. 937–946.
- [11] K. R. Canini, L. Shi, and T. L. Griffiths, "Online inference of topics with latent Dirichlet allocation," in *AISTATS*, 2009, pp. 65–72.
- [12] D. Mimno, M. D. Hoffman, and D. M. Blei, "Sparse stochastic inference for latent Dirichlet allocation," in *ICML*, 2012.
- [13] M. Hoffman, D. Blei, and F. Bach, "Online learning for latent Dirichlet allocation," in *NIPS*, 2010, pp. 856–864.
- [14] M. Wahabzada and K. Kersting, "Larger residuals, less work: Active document scheduling for latent Dirichlet allocation," in *ECML/PKDD*, 2011, pp. 475–490.
- [15] M. Wahabzada, K. Kersting, A. Pilz, and C. Bauckhage, "More influence means less work: fast latent Dirichlet allocation by influence scheduling," in *CIKM*, 2011, pp. 2273–2276.
- [16] D. Newman, A. Asuncion, P. Smyth, and M. Welling, "Distributed algorithms for topic models," *J. Mach. Learn. Res.*, vol. 10, pp. 1801–1828, 2009.
- [17] Y. Wang, H. Bai, M. Stanton, W. Y. Chen, and E. Chang, "Plda: Parallel latent Dirichlet allocation for large-scale applications," in *Algorithmic Aspects in Information and Management*, 2009, pp. 301–314.
- [18] F. Yan, N. Xu, and Y. Qi, "Parallel inference for latent Dirichlet allocation on graphics processing units," in *NIPS*, 2009, pp. 2134–2142.
- [19] A. Smola and S. Narayanamurthy, "An architecture for parallel topic models," in *PVLDB*, 2010, pp. 703–710.
- [20] Z. Liu, Y. Zhang, E. Chang, and M. Sun, "Plda+: Parallel latent Dirichlet allocation with data placement and pipeline processing," *ACM Transactions on Intelligent Systems and Technology*, p. 26, 2011.
- [21] K. Zhai, J. Boyd-Graber, and N. Asadi, "Using variational inference and MapReduce to scale topic modeling," *arXiv:1107.3765v1 [cs.AI]*, 2011.
- [22] L. Bottou, *Online learning and stochastic approximations*. Cambridge University Press, 1998.
- [23] G. Elidan, I. McGraw, and D. Koller, "Residual belief propagation: Informed scheduling for asynchronous message passing," in *UAI*, 2006, pp. 165–173.
- [24] I. Porteous, D. Newman, A. Ihler, A. Asuncion, P. Smyth, and M. Welling, "Fast collapsed Gibbs sampling for latent Dirichlet allocation," in *KDD*, 2008, pp. 569–577.
- [25] G. Heinrich, "Parameter estimation for text analysis," University of Leipzig, Tech. Rep., 2008.
- [26] C. Berge, *Hypergraphs*. North-Holland, Amsterdam, 1989.
- [27] C. M. Bishop, *Pattern recognition and machine learning*. Springer, 2006.
- [28] L. Bottou and Y. L. Cun, "Large scale online learning," in *NIPS*, 2004, pp. 217–224.
- [29] D. Newman, A. Asuncion, P. Smyth, and M. Welling, "Distributed algorithms for topic models," in *NIPS*, 2008, pp. 856–864.
- [30] J. Zeng, "A topic modeling toolbox using belief propagation," *J. Mach. Learn. Res.*, vol. 13, pp. 2233–2236, 2012.
- [31] J. Yan, Z.-Q. Liu, Y. Gao, and J. Zeng, "Communication-efficient parallel belief propagation for latent Dirichlet allocation," p. arXiv:1206.2190v1 [cs.LG], 2012.